FBHE Series

Chip Ferrite Bead High Current Type
Size 0603




FEATURES


- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Shapes and dimensions follow E.I.A. spec.
- Available in various sizes.
- Excellent solder ability and heat resistance.
- High reliability.
- 100% Lead(Pb) & Halogen-Free and RoHS compliant
- Low DC resistance structure of electrode to prevent wasteful electric power consumption.
- Quantity: 4000pcs

0.8±0.3 1.6±0.3 0.8±0.3 47.600 50.8±0.15

Dimensions: [mm]

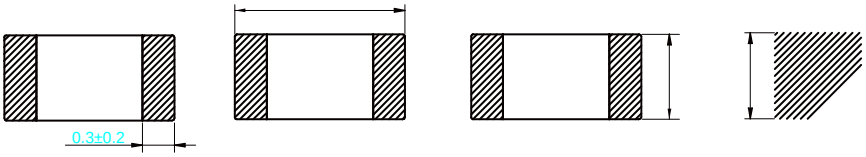

Land Pattern: [mm]





Electrical Properties:


Part No	Thickness C size	Impedance	Test Frequency	DC Resistance Max.	Rated Current Max.
C . I 9лслоπнслπслнw	л⌀слбл⌀мр	нсбнр̂ː̂	млл	л⌀лм	слллл
C . I 9лслоπоллπолнw	л⌀улбл⌀мр	олбнр̂ː̂	млл	л⌀лп	оллл
C . I 9лслоππллπолнw	л⌀улбл⌀мр	плбнр̂ː̂	млл	л⌀лп	оллл
C . I 9лслоπслπолнw	л⌀улбл⌀мр	слбнр̂ː̂	млл	л⌀лп	оллл
C . I 9лслоπуллπолнw	л⌀улбл⌀мр	улбнр̂ː̂	млл	л⌀лп	оллл
C . I 9лслоπмлмπолнw	л⌀улбл⌀мр	млл6нр̂ː̂	млл	л⌀лп	оллл
C . I 9лслоπмнмπнлнw	л⌀улбл⌀мр	мнлбнр̂ː̂	млл	л⌀мл	нллл
C . I 9лслоπмрмπнлнw	л⌀улбл⌀мр	мрлбнр̂ː̂	млл	л⌀мл	нллл
C . I 9лслоππнмπнлнw	л⌀улбл⌀мр	ннлбнр̂ː̂	млл	л⌀мл	нллл
C . I 9лслоπолмπнлнw	л⌀улбл⌀мр	оллбнр̂ː̂	млл	л⌀мл	нллл
C . I 9лслоπолмπмлнw	л⌀улбл⌀мр	оллбнр̂ː̂	млл	л⌀нл	млллл
C . I 9лслоππтмπмлнw	л⌀улбл⌀мр	пτлбнр̂ː̂	млл	л⌀нл	млллл
C . I 9лслоπслмπмлнw	л⌀улбл⌀мр	слллбнр̂ː̂	млл	л⌀нл	млллл


hLJŜ№I·əyƎ ¢ŜYˊLJŜ№I·údz№ŜY πpp˝C Ч Ьмнр˝C
¢ŜYˊLJŜ№I·údz№Ŝ №ăŜ ÕdzNNŜyű úKŜ I·ÕűdzI·f ØI·fdzŜ 2Ŧ 5 / ÕdzNNŜyű ǿKŜyˊúKŜ űŜYˊLJŜ№I·údz№Ŝ №ăŜ ƛă ɲ¢плˊC


Typical Electrical Characteristics:

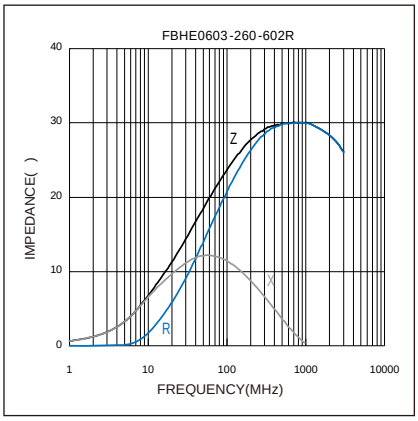


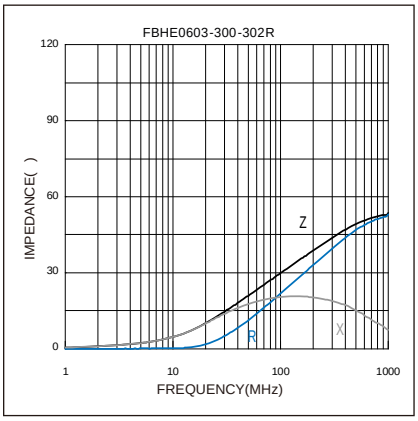


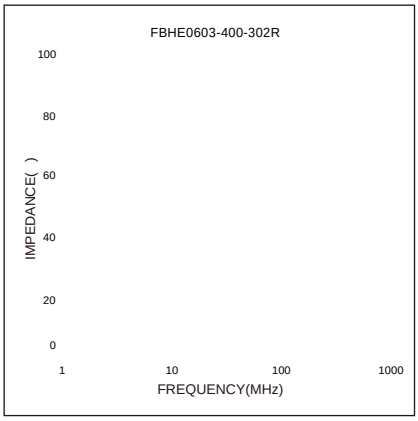


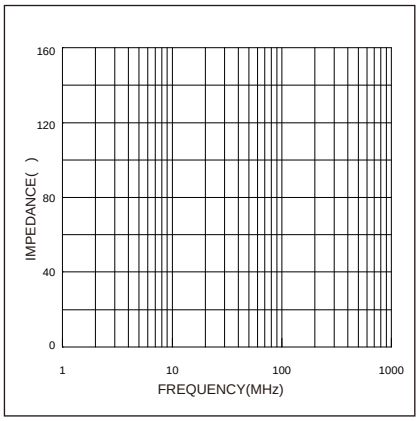

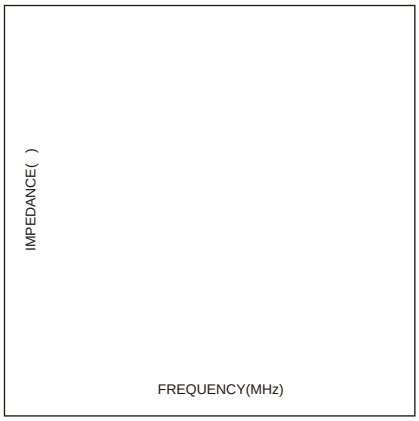


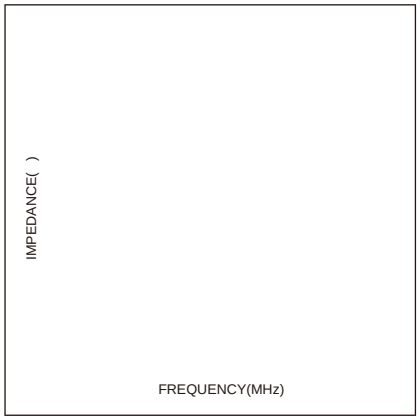

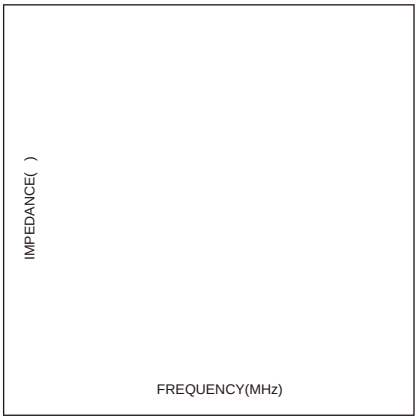

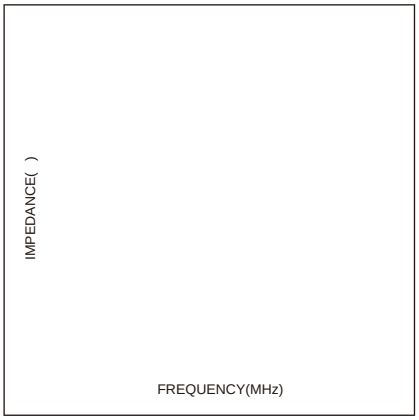

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

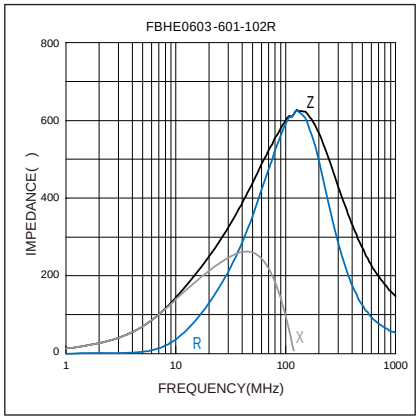

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com