NRSE Series

SMD Shielded Tiny Power Inductor
Size 4018


CHARACTERISTICS

- Magne c resin for higher current and semi-magne cally shielded
- Quan ty: 3000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

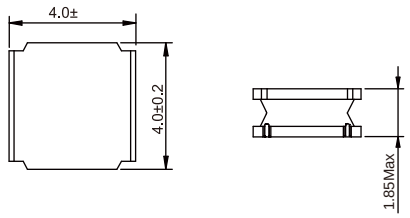

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance @100KHz/0.25V (μH)	Tolerance	Satura on Current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4018-R56N	0.56	±30%	5.50	3.50	18
NRSE4018-R68N	0.68	±30%	4.90	3.20	18
NRSE4018-1R0N	1.0	±30%	4.50	2.50	23
NRSE4018-1R2N	1.2	±30%	4.30	2.40	28
NRSE4018-1R5N	1.5	±30%	3.35	2.34	33
NRSE4018-1R8N	1.8	±30%	3.00	2.00	44
NRSE4018-2R2M	2.2	±20%	2.70	2.00	44
NRSE4018-3R3M	3.3	±20%	2.45	1.90	70
NRSE4018-4R7M	4.7	±20%	1.70	1.70	90
NRSE4018-5R6M	5.6	±20%	1.60	1.50	103
NRSE4018-6R8M	6.8	±20%	1.45	1.30	124
NRSE4018-8R2M	8.2	±20%	1.40	1.15	180
NRSE4018-100M	10	±20%	1.30	1.10	200
NRSE4018-120M	12	±20%	1.15	0.95	230
NRSE4018-150M	15	±20%	0.94	0.92	268
NRSE4018-180M	18	±20%	0.86	0.85	320

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com